

**LED** ●●●●●●●●●●

**FEATURES**

<b>120Lm/W</b>	<b>Dynamic White</b>
<b>Corners</b>	<b>Continuous Runs</b>
<b>Sun-Like 99CRI</b>	<b>DIM TO DARK</b>
<b>Custom Orders</b>	<b>4 WEEK TURNAROUND</b>

**OUTPUT**  
 - **Standard Output:** 7W per foot 720 Lumens per foot  
 - **High Output:** 8W per foot / 960 Lumens per foot  
 - **Ultra Output:** 10W per foot / 1200 Lumens per foot.  
 - **Dynamic White** - 2700K-6500K

**FINISH**  
 - Powder coat white standard  
 - Other RAL color options available please consult factory

**DRIVER**  
 - Integral 120-277v Eldo driver with standard 0-10V dimming for 1%

**REFLECTOR**  
 92% reflective white finish, die-formed steel


**OPTIONS**  
 90° inside and outside corner kits available

**OPTICS**  
 Sateen film diffuser


**CERTIFICATIONS**  
 IBEW (local 3) Union-Made in the USA

**MATERIALS**  
 - Extruded aluminum cove framing system

**TECHNICAL DRAWINGS**

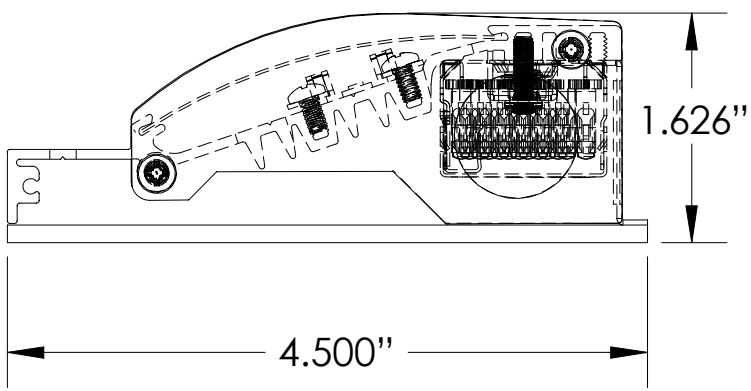

**PHOTOMETRICS**

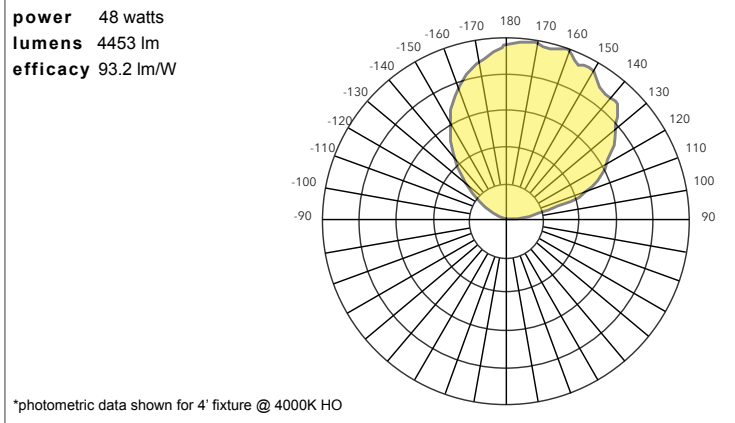

**ORDERING INFORMATION**

GHOGLX		
<b>FRAMING</b> GHOS - Ghost Cove GLX	<b>CASE LENGTH</b> 8 - 8ft RUN - Specify *field cuttable come in 8' lengths	<b>OPTIONS</b> ICK - Inside Corner Kit OCK - Outside Corner Kit CCK - Custom Corner Kit SFD - Sateen Lens CDC - Clear Dust Cover

<b>COLOR</b> 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K DW - Dynamic White	<b>OUTPUT</b> ST - Standard Output HO - High Output UL - Ultra Output	<b>LENGTH</b> 2 - 23 1/8" 3 - 33 3/4" 4 - 44 1/4" 6 - 66 1/2" 8 - 88 3/4"	<b>CONTROL</b> STD - standard 0-10V Eldo LED driver DA - DALI Dimming DMX - Tunable White D10 - Dual 0-10V Tunable
--	--	--	--

**Sample Number:**

