



A heavy duty luminaire designed for demanding environments. Provides uniform illumination with high output



FEATURES

OUTPUT

- MAKROLON polycarbonate LED lens system

DRIVER

- Pink
- Amber
- Blue
- Red

OPTIONS

Powder coat white or gray standard
 other RAL color options available



MATERIALS


- .125 thick extruded aluminum housing
- Hinged LED panel door assembly
- Cast aluminum ends

FINISH


Powder coat white or gray standard
 other RAL color options available

CERTIFICATIONS

- UL Listed
- IBEW (local 3)
- Union-Made in the USA
- IP66 wet location rated



TECHNICAL DRAWINGS

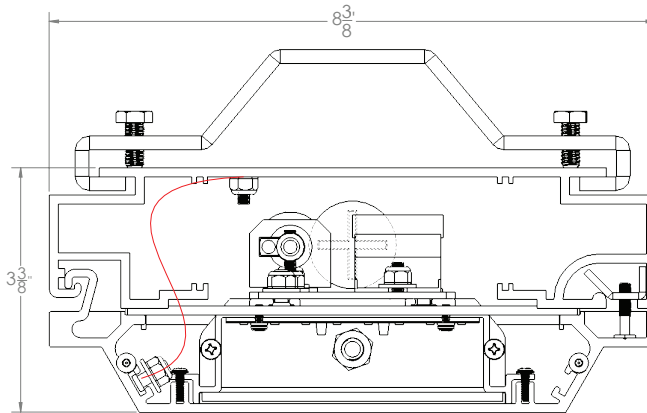

ORDERING INFORMATION

99JD						
SERIES 98JD LED	LENGTH	CCT	MOUNTING	LENS	OPTIONS	DIMMING
	1 - 18" nom	30 - 3000K	S - Surface	FD - Flat Diffused	90EM - 90 min battery	STD - Standard
	2 - 30" nom	27 - 2700K	P - Pendant	FA - Flat Asymmetric	240EM - 4 hr. battery	0-10V
	4 - 4' nom	35 - 3500K	C - Corner		STD - Standard	DA - DALI Dimmer
	6 - 6' nom	40 - 4000K	R - Retrofit door assembly			
	RUN - specify					

Sample Number: 99JD-6-27-P-FD-STD-DA

