



A vandal proof, high performance linear LED fixture with exceptional glare control. Specifically designed for wet location, it is IP65 rated and IK10 rated for impact resistance.

**FEATURES**



**OUTPUT**

High efficiency LED modules producing 112 lm/w at 3500K CCT. Rated lifetime is 150,000 hours based on LM-79 testing and TM-21 calculations in accordance with LM80 data collection.

**DRIVER**

EldoLed Drivers Standard. .1% 0-10V or DALI dimming, programmable drive technology allows for consistent light output in runs of various length fixtures.

**OPTIONS**

4 hour remote Emergency battery backup system.  
-Hybrid Emergency backup system with 600VDC constant backup & 4 hour battery atup to 50% initial output depending on initial wattage setting.



**FINISH**


Powder coat white or Gun Metal standard other RAL color options available

**MATERIALS**

.125 thick extruded aluminum housing with tooled gasket  
.135 thick hinged extruded door assembly laser cut aluminum end caps with tooled silicone gasket

**CERTIFICATIONS**

UL Listed, IBEW (local 3) Union-Made in the USA. IP65 Rated. IK10 Rated. Salt spray environmental approved. Blast test rated for tunnel usage. Vibration tested to 2G sinusoidal motion EMI tested for conducted and radiated emissions, proven not to interfere with emergency broadcast systems



**SOURCE**



High efficiency, high output Apogee designed modules, Tier 1 LED chips, 3 step Macadam color binning standard, 2 Step binning available.

**MOUNTING**

Surface, Recessed, Pendant, Corner



**TECHNICAL DRAWINGS**

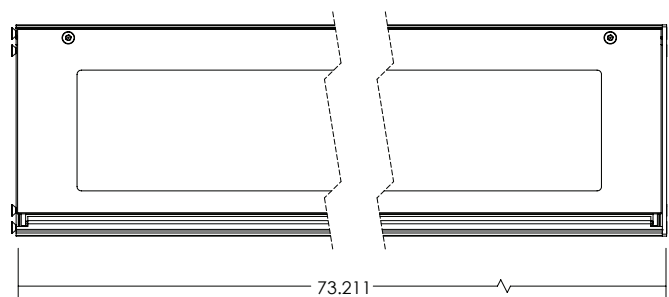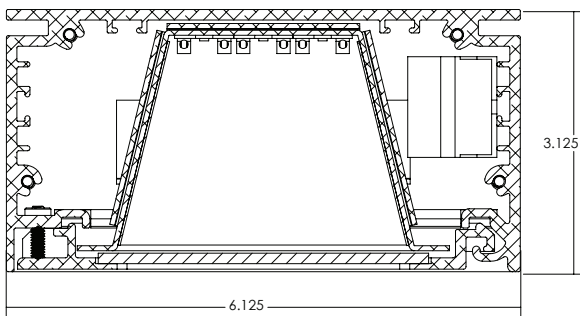

**ORDERING INFORMATION**

SERIES	LENGTH	CCT	MOUNTING	FINISH	LENS	OPTIONS	DIMMING
GC36	2 - 2'	30 - 3000K	S - surface	WH - white	FD - Flat Diffused	90EM - 90 min battery	STD - Standard
	4 - 4'	35 - 3500K	P - pendant	AL - aluminum	FA - Flat Asym-metric	240EM - 4 hr. battery	0-10V
	6 - 6'	40 - 4000K	C - corner	PG- platinum gray		STD - Standard	DA - DALI Dimmer
	RUN - specify	50 - 5000K	R - Recessed	GM - Gun Metal			
				BL - Black			

Sample Number: GC36-4-35-S-GM-FA-90EM-DA

