

LED ●●●●●●●●

FEATURES

120Lm/W	Dynamic White
Corners	Continuous Runs
Sun-Like 99CRI	DIM TO DARK
Custom Orders	4 WEEK TURNAROUND

OUTPUT
 - **Standard Output:** 7W per foot / 720 Lumens per foot
 - **High Output:** 8W per foot / 960 Lumens per foot
 - **Ultra Output:** 10W per foot / 1200 Lumens per foot.
 - **Dynamic White** - 2700K-6500K

FINISH
 - Powder coat white standard
 - Other RAL color options available please consult factory

DRIVER
 - Integral 120-277v Eldo driver with standard 0-10V dimming for 1%

REFLECTOR
 92% reflective white finish, die-formed steel


OPTIONS
 90° inside and outside corner kits available

MATERIALS
 - Extruded aluminum cove framing system
 - Extruded aluminum LED gear trays

OPTICS
 Sateen film diffuser


CERTIFICATIONS
 IBEW (local 3) Union-Made in the USA

TECHNICAL DRAWINGS

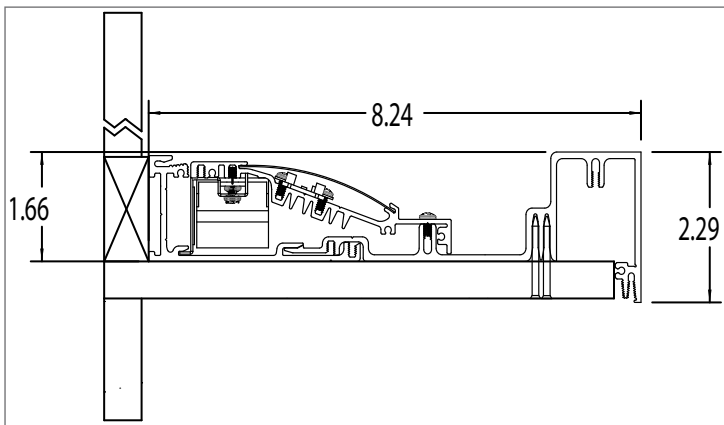

PHOTOMETRICS

power 48 watts
lumens 4453 lm
efficacy 93.2 lm/W

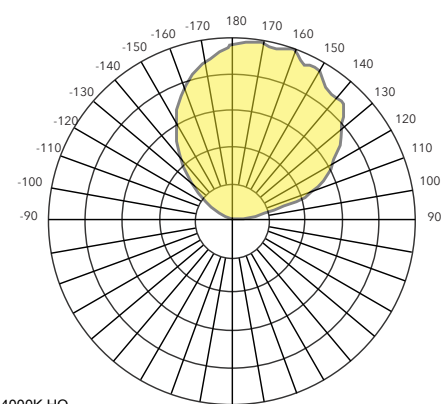

*photometric data shown for 4' fixture @ 4000K HO

ORDERING INFORMATION

GHOS

FRAMING GHOS - Ghost Cove Square Edge	CASE LENGTH 8 - 8ft RUN - Specify *field cuttable come in 8' lengths	OPTIONS ICK - Inside Corner Kit OCK - Outside Corner Kit CCK - Custom Corner Kit SFD - Sateen Lens CDC - Clear Dust Cover
---	--	---

GGT

GEAR TRAY GGT - Ghost	COLOR 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K DW - Dynamic White	OUTPUT ST - Standard Output HO - High Output UL - Ultra Output	LENGTH 2 - 23 1/8" 3 - 33 3/4" 4 - 44 1/4" 6 - 66 1/2" 8 - 88 3/4"	CONTROL STD - standard 0-10V Eldo LED driver DA - DALI Dimming DMX - Tunable White D10 - Dual 0-10V Tunable
---------------------------------	--	--	--	--

Sample Number:

Products / Architectural/Ghost Cove Square LED

Apogee Lighting Holdings LLC • 593 Acorn Street • Deer Park, NY 11729 • T: 631.254.6975 • www.Apogee-Lighting.com



REV.2.3