



LED ●●●●●●●●

FEATURES

120Lm/W

Dynamic White

OUTPUT
 - **Standard Output:** 7W per foot / 720 Lumens per foot
 - **High Output:** 8W per foot / 960 Lumens per foot
 - **Ultra Output:** 10W per foot / 1200 Lumens per foot.
 - **Dynamic White** - 2700K-6500K

FINISH
 - Powder coat white standard
 - Other RAL color options available please consult factory

DRIVER
 - Integral 120-277v Eldo driver with standard 0-10V dimming to 1%

Corners

Continuous Runs

Sun-Like
99CRI

DIM TO DARK

REFLECTOR
 92% reflective white finish, die-formed steel

OPTIONS
 90° inside and outside corner kits available

Custom Orders


4 WEEK TURNAROUND

MATERIALS
 - Extruded aluminum cove framing system
 - Extruded aluminum LED gear trays

OPTICS
 Sateen film diffuser


CERTIFICATIONS
 IBEW (local 3) Union-Made in the USA

TECHNICAL DRAWINGS

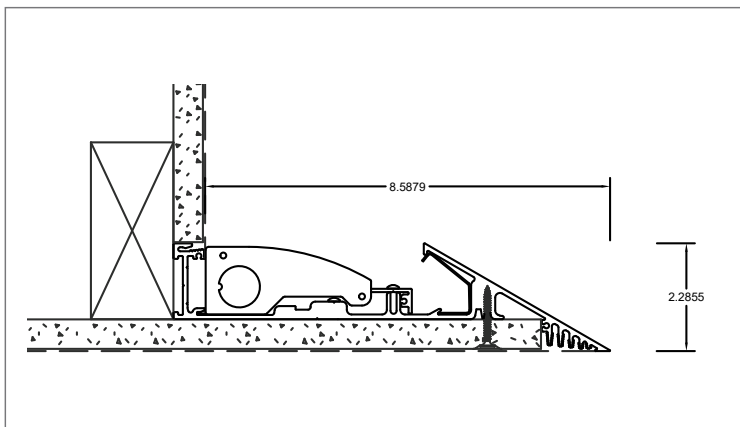

PHOTOMETRICS

power 48 watts
lumens 4453 lm
efficacy 93.2 lm/W

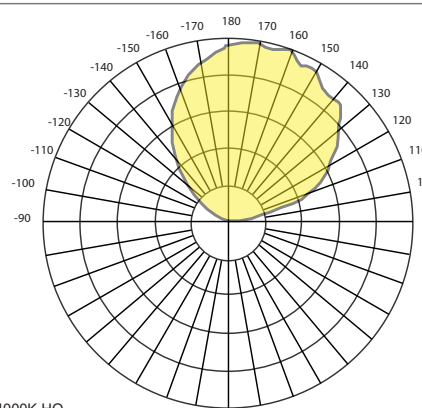

*photometric data shown for 4' fixture @ 4000K HO

ORDERING INFORMATION

GHO

FRAMING
 GHO - Ghost Cove Knife Edge

CASE LENGTH
 8 - 8ft
 RUN - Specify
 *field cuttable come in 8' lengths

OPTIONS
 ICK - Inside Corner Kit
 OCK - Outside Corner Kit
 CCK - Custom Corner Kit
 SFD - Sateen Lens
 CDC - Clear Dust Cover

GGT

GEAR TRAY
 GGT - Ghost

COLOR
 27 - 2700K
 30 - 3000K
 35 - 3500K
 40 - 4000K
 50 - 5000K
 57 - 5700K
 65 - 6500K
 DW - Dynamic White

OUTPUT
 ST - Standard Output
 HO - High Output
 UL - Ultra Output

LENGTH
 2 - 23 1/8"
 3 - 33 3/4"
 4 - 44 1/4"
 6 - 66 1/2"
 8 - 88 3/4"

CONTROL
 STD - standard 0-10V Eldo LED driver
 DA - DALI Dimming
 DMX - Tunable White
 D10 - Dual 0-10V Tunable

Sample Number:

