



A vandal proof, high performance linear LED fixture with exceptional glare control. Specifically designed for wet location, it is IP65 rated and IK10 rated for impact resistance.

**LED ●●●●●●●●●●** **FEATURES**

**IP65 Rated**

**IK10**

**OUTPUT**  
 Programmable output ranging from 4W- 16W per foot.  
 100lm/w at 3000k / 120lm/w at 5000k

**LENS**  
 - Proprietary Apogee blend Diffused Polycarbonate lens, 5VA flame rated, .125" thick, IK10 rated for impact resistance.

**FINISH**  
 Standard colors are Black Steel, Gunmetal, Platinum, Grey, Matte White and Apogee Silver. Custom RAL colors are available

**DIM TO DARK**

**VANDAL PROOF**

**SOURCE**  
 High efficiency, high output Apogee designed modules, Tier 1 LED chips, 3 step Macadam color binning standard, 2 Step binning available.

**HOUSING**  
 .125" hard anodized extruded aluminum housing with 3mil post powder coat.

**MOUNTING**  
 -Surface mount slotted feet  
 -Wall mount stairwell brackets  
 -Corner mount adjustable brackets

**Over 100 LM/W**

**EMERGENCY OPTIONS**

**DRIVER TECHNOLOGY**  
 EldoLed Drivers Standard. .1% 0-10V or DALI dimming, programmable drive technology allows for consistent light output in runs of various length fixtures. IP67 Inventronics programmable drivers available, consult factory Class B-Standard Driver.

**OPTIONS**  
 -4 hour remote Emergency battery backup system  
 -Hybrid Emergency backup system with 600VDC constant backup & 4 hour battery at up to 50% initial output depending on initial wattage setting.  
 -Prismatic slump diffused lens  
 -Flat lens option for low ceiling areas

**CERTIFICATIONS**  
 UL Listed, IBEW (local 3) Union-Made in the USA. IP65 Rated. IK10 Rated. Salt spray environmental approved. Blast test rated for tunnel usage. Vibration tested to 2G sinusoidal motion EMI tested for conducted and radiated emissions, proven not to interfere with emergency broadcast systems


**RUNS**

**MADE IN USA**


**5 Year LED Warranty**

**UL**


**TECHNICAL DRAWINGS**

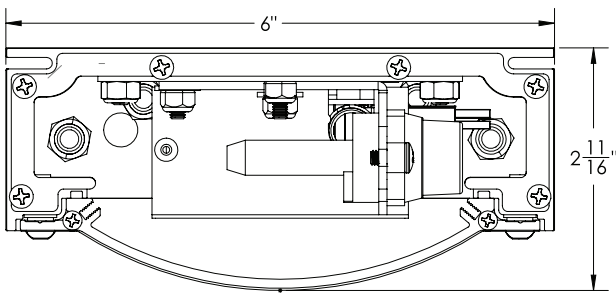


**EM SECTION**

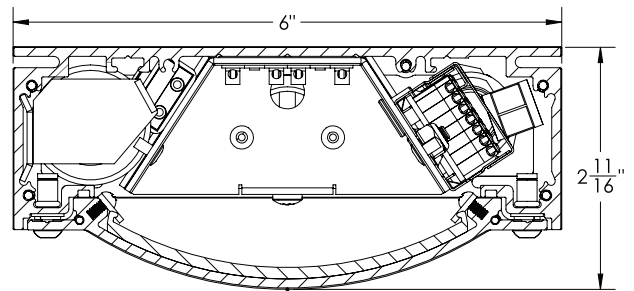

**STD CUT**

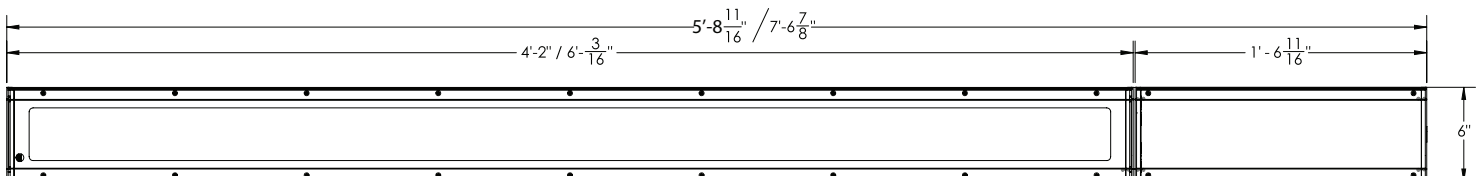

# PHOTOMETRICS



Frosted Polycarbonate Lens

## ORDERING INFORMATION

### VR4

SERIES	OUTPUT	COLOR	CONTROL	LENGTH	MOUNTING	FINISH	OPTIONS
	L - 6W/ft	27 - 2700k	STD - 0-10V dim	2 - 2'	SM - Surface mount	BS - Black Steel	* BB-4 hour battery backup
	S - 8.4W/ft	30 - 3000k	DA - DALI dim	3 - 3'	W - Wall mount	GM - Gun Metal	* HY - Hybrid Emergency system
	H - 12W/ft	35 - 3500k		4 - 4'	CA - Adjustable corner mount	PG - Platinum Grey	TP - Tamper Proof Hardware
	U - 16W/ft	40 - 4000k		5 - 5'		AS - Apogee Silver	SS - Stainless Steel Hardware
		50 - 5000k		6 - 6'		MW - Matte White	BO - Black Oxide coated hardware
				Run		Custom RAL - Consult factory	

\* 4HR Battery backup requires additional 19" compartment. See drawings for EM Version

**Sample Number:** VR4-L-35-DA-6-SM-BS-BO

