

FEATURES




OUTPUT
Over 100Lm/w @ 3000K



SOURCE
High efficiency, high output Apogee designed modules, Tier 1 LED chips, 3 step Macadam color binning standard, 2 Step binning available.



POWER SUPPLY
Constant current linear power supply remote mounted in separate enclosure.



DIMMING
Step Dimming via 0-10V interface.



LENS
Proprietary Apogee blend Diffused Polycarbonate lens, 5VA flame rated, .125" thick, IK10 rated for impact resistance.


HOUSING
.125" hard anodized extruded aluminum housing with 3mil post powder coat.

MOUNTING
- Yoke / pendant mount
- Surface mount slotted feet
- Wall mount stairwell brackets
- Corner mount adjustable brackets


FINISH
Standard colors are Black Steel, Gunmetal, Platinum, Grey, Matte White and Apogee Silver. Custom RAL colors are available.

CERTIFICATIONS
UL Listed, IBEW (local 3) Union-Made in the USA. IP65 Rated. IK10 Rated. Salt spray environmental approved. Blast test rated for tunnel usage. Vibration tested to 2G sinusoidal motion. EMI tested for conducted and radiated emissions, proven not to interfere with emergency broadcast systems.

TECHNICAL DRAWINGS

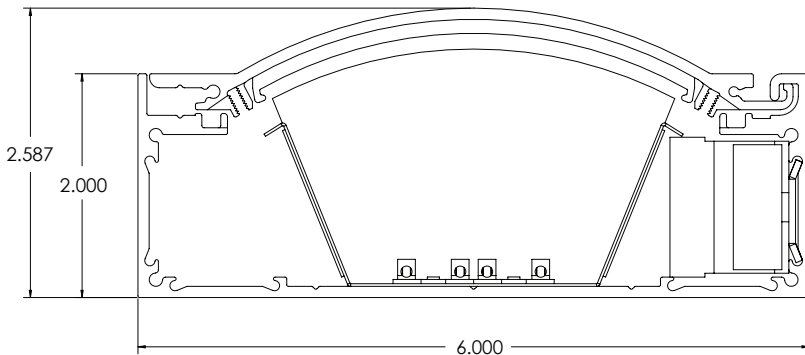

PHOTOMETRICS

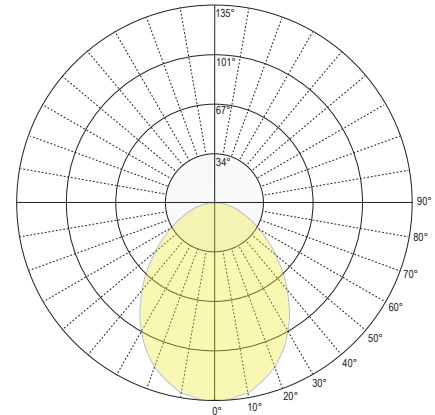

ORDERING INFORMATION

VR60	OUTPUT	COLOR	CONTROL	LENGTH	MOUNTING	FINISH	OPTIONS
SERIES	L - 6W/ft	27 - 2700k	STD - 0-10V dim	2- 2'	SM - Surface mount	BS - Black Steel	BB-4 hour battery backup
	S - 8.4W/ft	30 - 3000k		3-3'	P- pendant mount	GM - Gun Metal	HY - Hybrid Emergency system
	H - 12W/ft	35 - 3500k		4-4'	W- Wall mount	PG - Platinum Grey	TP - Tamper Proof Hardware
	U - 16W/ft	40 - 4000k		5-5'	CA - Adjustable	AS - Apogee Silver	SS - Stainless Steel Hardware
		50 - 5000k		6-6'	Cor ner mount	MW - Matte White	BO- Black Oxide coated hardware
				8-8'		Custom RAL - Consult factory	90 - 90 Minute battery backup

